




## HIGHWAY RIB H08

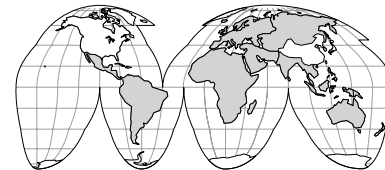

The H08 has been designed to meet the requirements of a wide variety of modern transport vehicles operating on highways at high speed. This series covers 60, 65, 70, 75 and 80 size ranges with speed ratings of Q, R, S and T. With its four main straight rib design and wide tread width, H08 provides excellent handling capabilities under dry or wet conditions.

Rim Dia.	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	PLY RATING	TYPE	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM (Inch)	ALTERNATE RIM (Inch)
							OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
17	215/60 R17C	104/102T	-	TL	BL	10.2	690	217	269	237	6.50	6.00 - 7.00
	225/60 R16C	105/103T	-	TL	BL	9.8	676	227	309	247	6.50	6.50 - 7.50
	215/60 R16C	103/101T	-	TL	BL	10.2	667	218	260	238	6.50	6.00 - 7.00
	235/65 R16C	115/113R	-	TL	BL	10.2	712	242	278	264	7.0	6.50 - 7.50
	225/65 R16C	112/110R	-	TL	BL	10.2	700	228	273	249	6.50	6.00 - 7.00
	215/65 R16C	106/104T	-	TL	BL	10.2	687	220	313	240	6.50	6.00 - 7.00
	215/65 R16C	109/107R	-	TL	BL	10.2	688	219	268	239	6.50	6.00 - 7.00
	205/65 R16C	107/105T	-	TL	BL	10.2	671	209	262	228	6.00	5.50 - 6.50
	195/65 R16C	100/98T	-	TL	BL	10.2	661	197	302	215	6.00	5.50 - 6.00
	195/65 R16C	104/102R	-	TL	BL	10.2	661	199	258	217	6.00	5.50 - 6.00
	225/75 R16C	118/116R	-	TL	BL	11.2	743	224	334	244	6.00	6.00 - 7.00
	225/75 R16C	121/120Q	-	TL	BL	11.2	744	223	346	240	6.00	6.00 - 7.00
	215/75 R16C	113/111R	-	TL	BL	11.2	728	217	329	237	6.00	5.50 - 7.00
	215/75 R16C	116/114Q	-	TL	BL	11.2	728	215	339	235	6.00	5.50 - 7.00
	205/75 R16C	110/108R	-	TL	BL	11.2	714	206	323	225	5.50	5.50 - 6.50
	205/75 R16C	113/111Q	-	TL	BL	11.2	714	204	332	224	5.50	5.50 - 6.50
	195/75 R16C	107/105S	-	TL	BL	10.7	696	197	316	214	5.50	5.00 - 6.00
185/75 R16C	104/102S	-	TL	BL	10.7	684	185	311	202	5.00	5.00 - 6.00	
175/75 R16C	101/99S	-	TL	BL	10.7	668	176	261	192	5.00	4.50 - 5.50	
15	205/65 R15C	102/100T	-	TL	BL	10.2	647	207	252	226	6.00	5.50 - 6.50
	225/70 R15C	112/110S	-	TL	BL	10.7	695	228	313	249	6.50	6.00 - 7.00
	215/70 R15C	109/107S	-	TL	BL	10.2	680	219	265	239	6.50	5.50 - 7.00
	215/70 R15C	109/107S	-	TL	BL	10.7	685	215	315	228	6.50	5.50 - 6.50
	205/70 R15C	106/104S	-	TL	BL	10.2	667	203	260	221	6.00	5.50 - 6.50
	195/70 R15C	104/102S	-	TL	BL	10.2	652	202	296	220	6.00	5.00 - 6.00
	225/75 R15C	110/108Q	-	TL	BL	11.2	719	227	280	247	6.00	6.00 - 7.00
	195 R15C	103/101S	-	TL	BL	9.7	693	191	312	208	5.50	5.00 - 6.00
185 R15C	103/102S	-	TL	BL	10.8	674	189	305	206	5.50	5.00 - 6.00	
14	175/65 R14C	90/88T	-	TL	BL	10.2	584	179	267	195	5.00	5.00 - 5.50
	165/70 R14C	89/87R	-	TL	BL	9.7	585	167	267	182	5.00	4.50 - 5.00
	195/75 R14C	106/104S	-	TL	BL	10.7	645	197	252	215	5.50	5.00 - 6.00
	185/75 R14C	102/100S	-	TL	BL	10.7	632	186	246	203	5.00	5.00 - 6.00
	165/75 R14C	97/95R	-	TL	BL	10.7	601	165	234	180	4.50	4.00 - 5.00
	215 R14C	112/110S	-	TL	BL	11.2	699	222	312	242	6.00	5.50 - 7.00
	205 R14C	109/107S	-	TL	BL	11.2	686	213	307	232	6.00	5.50 - 6.50
	195 R14C	106/104S	-	TL	BL	10.7	666	201	299	219	5.50	5.00 - 6.00
	185 R14C	102/100S	-	TL	BL	10.7	650	193	293	210	5.50	5.00 - 6.00
175 R14C	99/98S	-	TL	BL	10.7	634	180	286	196	5.00	5.00 - 6.00	
13	165/70 R13C	88/86R	-	TL	BL	9.7	559	167	254	182	5.00	4.50 - 5.00

□: H02

[TYPE] TL: TUBELESS

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.