




HIGHWAY RIB M144(A)

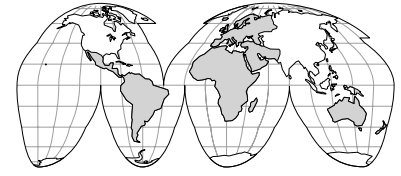

The M144/M144A, TOYO TIRES' highway rib tire, has been developed to deliver exceptional high mileage and improved irregular wear performance in mid-to-long highway haul operations. Its special differential-grooves in the shoulder ribs are combined with an optimum casing profile to effectively resist irregular wear and ensure long tread life. Developed under DSOCII, TOYO TIRES' advanced tire design technology, the M144/M144A satisfy users' needs in this segment ensuring highly competitive low cost mileage performance and better retreadability.

Rim Dia.	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	PLY RATING	TYPE	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM (Inch)	ALTERNATE RIM (Inch)
							OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
22.5	315/70 R22.5	152/148M	-	TL	BL	15.0	1020	313	474	338	9.00	9.00 - 9.75
	305/70 R22.5	150/148M	-	TL	BL	14.9	1004	307	467	328	9.00	8.25 - 9.00
	315/80 R22.5	154/150M	-	TL	BL	15.0	1082	312	503	340	9.00	9.00 - 9.75
	295/80 R22.5	152/148M	-	TL	BL	15.0	1054	303	490	328	9.00	8.25 - 9.00
	315/80 R22.5	154/150M	-	TL	BL	15.0	1082	312	503	340	9.00	9.00 - 9.75
	295/80 R22.5	152/148M	-	TL	BL	15.0	1054	303	490	328	9.00	8.25 - 9.00

□: M144A has no Differential-Grooves.

[TYPE] TL: TUBELESS

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.