




HIGHWAY TRACTION M608Z

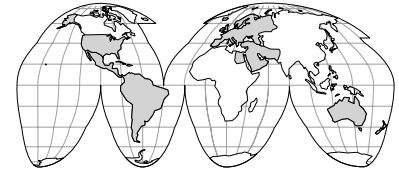

The low-profile M608Z has an aggressive traction pattern for drive axles and also offers longer tread life owing to its large contact area and deeper tread.

Rim Dia.	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	PLY RATING	TYPE	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM (Inch)	ALTERNATE RIM (Inch)
							OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
17.5	235/75 R17.5	132/130M	-	TL	BL	15.8	812	237	378	258	6.75	6.75 - 7.50
	225/75 R17.5	129/127M	-	TL	BL	15.8	798	230	371	250	6.75	6.00 - 6.75
	215/75 R17.5	126/124M	-	TL	BL	15.4	781	215	363	235	6.00	6.00 - 6.75
	215/75 R17.5	124/123L	-	TL	BL	15.4	781	215	363	235	6.00	6.00 - 6.75
	205/75 R17.5	124/122M	-	TL	BL	14.9	768	202	357	220	6.00	5.25 - 6.75

[TYPE] TL: TUBELESS

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.