




ON AND OFF M71A

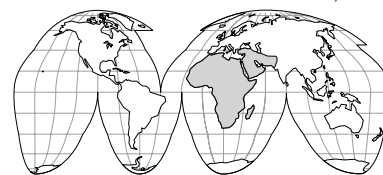

The M71A has been developed for all wheel positions in on-and-off highway use. Its rib-lug tread pattern provides good traction and higher mileage and reduces heat generation.

Rim Dia.	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	PLY RATING	TYPE	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM (Inch)	ALTERNATE RIM (Inch)
							OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
24	1200 R24	156/153K	-	TT	BL	16.3	1203	300	559	331	8.50	8.50 - 9.00
20	1200 R20	154/150K	-	TT	BL	16.3	1120	308	521	339	8.50	8.50 - 9.00

[TYPE] TT: TUBE TYPE

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.