




# ALL TERRAIN OPEN COUNTRY A/T

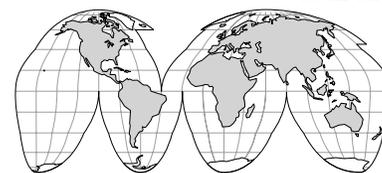

The durable Open Country A/T offers aggressive wet and snow traction with exceptional mileage for pickups, vans and sport utility vehicles. This versatile all-terrain radial delivers rugged good looks without compromising on handling, ride comfort and on and off road stability.

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
24	50	LT325/50 R24	124R	BL	13.2	933	325	431	354	10.00	9.00 - 12.00
22	40	305/40 R22	114S XL	BL	11.1	802	309	374	337	11.00	10.00 - 12.00
	45	305/45 R22	118S XL	BL	11.0	829	302	385	329	10.00	9.50 - 11.50
	50	LT325/50 R22	122R	BL	13.1	885	329	407	359	10.00	9.50 - 10.50
		LT305/50 R22	119S	BL	12.4	862	315	398	343	9.50	8.00 - 11.00
LT285/50 R22		121S	BL	12.4	843	292	390	318	9.00	8.00 - 10.00	
20	50	305/50 R20	120T XL	BL	11.0	810	310	372	338	9.50	8.50 - 11.00
		285/50 R20	116T XL	BL	9.8	795	293	366	319	9.00	8.00 - 10.00
	55	LT305/55 R20	121S	BL	12.4	844	316	385	344	9.50	8.50 - 11.00
		LT285/55 R20	122S	WO	12.4	821	297	376	324	9.00	8.00 - 10.00
		P275/55 R20	111S	WO	10.3	809	285	371	311	8.50	7.50 - 9.50
	60	LT355/60 R20	125R	BL	13.1	934	360	420	392	10.50	10.00 - 11.50
		LT325/60 R20	121R	BL	12.4	893	327	404	356	9.50	9.00 - 12.00
		LT305/60 R20	123S	BL	12.4	872	319	396	348	9.00	8.50 - 11.00
		P275/60 R20	114T	WO	10.3	835	279	382	304	8.00	7.50 - 9.50
		LT275/65 R20	126S	WO	12.8	864	279	393	304	8.00	7.50 - 9.50
65	LT275/65 R20	126S	WO	12.8	864	279	393	304	8.00	7.50 - 9.50	
18	55	255/55 R18	109H XL	BL	9.7	737	262	338	285	8.00	7.00 - 9.00
	60	LT325/60 R18	119S	BL	12.4	839	320	378	348	9.50	9.50 - 10.50
		285/60 R18	120S XL	BL	10.8	795	292	360	318	8.50	8.00 - 10.00
		P265/60 R18	109S	BL	10.2	777	272	353	296	8.00	7.50 - 9.50
	65	LT355/65 R18	125R	BL	13.1	932	356	414	388	10.50	10.00 - 11.00
		LT325/65 R18	121R	BL	13.1	886	330	396	360	9.50	9.00 - 10.00
		LT285/65 R18	125S	WO	13.1	825	290	372	316	8.50	8.00 - 10.00
		P275/65 R18	114T	WO	10.3	815	280	368	305	8.00	7.00 - 9.50
		LT275/65 R18	113T	WO	12.4	811	278	367	303	8.00	7.50 - 9.00
		LT275/65 R18	123S	WO	12.4	813	279	367	304	8.00	7.50 - 9.00
		P265/65 R18	112S	WO	10.2	803	269	363	293	8.00	7.50 - 9.50
	70	LT275/70 R18	125S	WO	12.4	843	279	379	304	8.00	7.00 - 8.50
		P265/70 R18	114S	WO	10.5	829	272	374	296	8.00	7.00 - 9.00
		P255/70 R18	112T	WO	10.7	816	261	368	284	7.50	6.50 - 8.50
		LT285/75 R18	129S/126S	BL	13.2	885	285	395	311	8.00	7.50 - 9.50
	17	60	P275/60 R17	110T	WO	10.3	760	282	344	307	8.00
235/60 R17			102H	BL	10.0	714	240	326	262	7.00	6.50 - 8.50
65		275/65 R17	115T	BL	10.4	788	280	355	305	8.00	7.50 - 9.50
		265/65 R17	112S	WO	10.2	775	270	350	294	8.00	7.50 - 9.50
		P265/65 R17	110S	WO	10.2	775	270	350	294	8.00	7.50 - 9.50
		255/65 R17	110H	WO	10.1	767	260	347	283	7.50	7.00 - 9.00
		P255/65 R17	108S	WO	10.1	765	253	346	276	7.50	7.00 - 9.00
		245/65 R17	111H	WO	10.0	750	246	340	268	7.00	7.00 - 8.50
		P245/65 R17	105T	WO	10.0	749	245	340	267	7.00	7.50 - 8.50
		P235/65 R17	103H	WO	9.9	736	239	335	261	7.00	6.50 - 8.50
		225/65 R17	102H	WO	9.8	724	226	330	246	6.50	6.00 - 8.00

2 SUV/4x4

# OPEN COUNTRY A/T

2 SUV/4x4

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)	
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)			
17	70	LT355/70 R17	127R, 8PR	BL	13.3	928	360	409	392	10.50	9.50 - 11.00	
		LT325/70 R17	122R, 8PR	BL	13.3	886	330	393	360	9.50	8.50 - 11.00	
		P285/70 R17	117T	WO	10.3	760	282	344	307	8.00	7.00 - 9.50	
		LT285/70 R17	126S	WO	13.2	830	291	371	317	8.50	7.50 - 9.00	
		LT285/70 R17	121S, 8PR	WO	13.1	830	288	371	314	8.50	7.50 - 9.00	
		LT265/70 R17	121S	BL	12.4	802	273	360	298	8.00	7.00 - 8.50	
		LT265/70 R17	121S, 10PR	WO	12.4	804	272	361	296	8.00	7.00 - 8.50	
		P265/70 R17	113S	BL	*	*	*	*	*	*	*	*
		P265/70 R17	113S	WO	10.4	802	274	360	299	8.00	7.00 - 9.00	
		P255/70 R17	110S	WO	10.3	790	259	356	282	7.50	6.50 - 8.50	
		LT245/70 R17	119S	WO	12.1	775	247	350	269	7.00	6.50 - 8.00	
	P245/70 R17	108S	WO	10.2	776	248	350	270	7.00	6.50 - 8.00		
	P235/70 R17	108S XL	WO	10.1	760	243	344	265	7.00	6.00 - 8.00		
	75	LT285/75 R17	128S	WO	13.1	860	286	383	311	8.00	7.50 - 9.50	
		P255/75 R17	113S	WO	10.3	815	253	365	276	7.00	6.50 - 8.50	
		LT245/75 R17	121S	WO	12.1	799	251	359	274	7.00	6.50 - 7.50	
		P245/75 R17	110S	WO	10.2	799	250	359	273	7.00	6.50 - 8.00	
P235/75 R17		108S	WO	10.1	784	236	353	257	6.50	6.00 - 8.00		
80	LT235/80 R17	120S	WO	12.1	806	235	362	257	6.50	6.00 - 7.50		
16	65	LT365/65 R16	125R	BL	13.1	886	368	390	401	11.00	10.00 - 11.50	
		255/65 R16	109H	BL	10.2	745	254	335	277	7.50	7.00 - 9.00	
	70	LT305/70 R16	124Q	WO	13.1	830	312	368	340	9.00	8.00 - 9.50	
		P275/70 R16	114H	BL	10.5	795	273	355	298	8.00	7.00 - 9.00	
		P275/70 R16	114H	WO	10.5	795	273	355	298	8.00	7.00 - 9.00	
		P275/70 R16	114S	BL	10.5	795	273	355	298	8.00	7.00 - 9.00	
		265/70 R16	112T	WO	10.3	777	271	348	295	8.00	7.00 - 9.00	
		P265/70 R16	111T	WO	10.4	779	266	349	290	8.00	7.00 - 9.00	
		LT265/70 R16	117S	WO	12.4	776	272	348	297	8.00	7.00 - 8.50	
		P255/70 R16	109S	WO	10.3	764	247	343	269	7.50	6.50 - 8.50	
		245/70 R16	111S XL	WO	10.2	746	249	336	271	7.00	6.50 - 8.00	
		245/70 R16	107S	WO	10.2	745	246	335	268	7.00	6.50 - 8.00	
		P245/70 R16	106S	WO	10.2	745	243	335	265	7.00	6.50 - 8.00	
		235/70 R16	106T	WO	10.1	735	238	331	259	7.00	6.00 - 8.00	
		P235/70 R16	104T	BL	10.1	734	239	331	261	7.00	6.00 - 8.00	
		P235/70 R16	104T	WO	10.1	735	235	331	256	7.00	6.00 - 8.00	
		225/70 R16	102S	WO	10.0	726	226	328	246	6.50	6.00 - 7.50	
P225/70 R16	101S	WO	10.0	726	226	328	246	6.50	6.00 - 7.50			
P215/70 R16	99S	BL	9.9	711	218	322	238	6.50	5.50 - 7.00			

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
16	75	LT315/75 R16	121Q	WO	13.1	877	319	387	347	8.50	8.00 - 11.00
		LT295/75 R16	123Q	WO	13.1	845	298	374	324	8.00	7.50 - 9.50
		LT285/75 R16	122Q	WO	13.1	830	288	368	314	8.00	7.50 - 9.00
		P265/75 R16	114S	WO	10.4	804	261	358	284	7.50	7.00 - 9.00
		LT265/75 R16	123Q	BL	12.4	882	271	357	295	7.50	7.00 - 8.00
		LT265/75 R16	123Q	WO	12.4	882	271	357	295	7.50	7.00 - 8.00
		LT265/75 R16	119Q	BL	12.4	882	271	357	295	7.50	7.00 - 8.00
		LT265/75 R16	119Q	WO	12.4	882	271	357	295	7.50	7.00 - 8.00
		LT265/75 R16	112S	WO	12.4	882	271	357	295	7.50	7.00 - 8.00
		P245/75 R16	109S	WO	10.2	775	250	347	273	7.00	6.50 - 8.00
		LT245/75 R16	108S	BL	10.2	775	250	347	273	7.00	6.50 - 8.00
		LT245/75 R16	108S	WO	10.2	775	250	347	273	7.00	6.50 - 8.00
		LT245/75 R16	120Q	BL	10.2	775	250	347	273	7.00	6.50 - 8.00
		LT245/75 R16	120Q	WO	10.2	775	250	347	273	7.00	6.50 - 8.00
		P235/75 R16	106T	WO	10.1	759	236	341	257	6.50	6.00 - 8.00
		P225/75 R16	104S	BL	10.0	747	226	336	246	6.00	6.00 - 7.50
LT225/75 R16	115Q/112Q	BL	11.0	742	225	334	245	6.00	6.00 - 7.50		
LT225/75 R16	110Q/107Q	BL	11.0	742	225	334	245	6.00	6.00 - 7.50		
16	85	LT235/85 R16	120Q	BL	12.1	808	239	360	261	6.50	6.00 - 7.00
		LT215/85 R16	115Q/112Q	BL	11.9	774	218	347	238	6.00	5.50 - 7.00
15	70	P265/70 R15	110S	BL	10.4	753	265	336	289	8.00	7.00 - 9.00
		255/70 R15	112/110S	BL	12.3	739	260	330	283	7.50	7.00 - 8.00
		P235/70 R15	102S	WO	10.1	710	235	319	256	7.00	6.00 - 8.00
		P225/70 R15	100T	WO	10.0	700	226	315	246	6.50	6.00 - 7.50
		215/70 R15	98H	BL	10.0	686	212	309	231	6.50	5.50 - 7.00
	75	P265/75 R15	112S	WO	10.4	779	261	346	284	7.50	7.00 - 9.00
		LT235/75 R15	110/107S	WO	11.1	731	234	327	255	6.50	6.00 - 7.00
		235/75 R15	109S XL	WO	10.2	734	239	328	261	6.50	6.00 - 8.00
		P235/75 R15	108S	WO	10.1	735	239	337	261	6.50	6.00 - 8.00
		P235/75 R15	105S	WO	10.1	734	239	328	261	6.50	6.00 - 8.00
		LT235/75 R15	104S	BL	11.1	731	235	327	256	6.50	6.00 - 7.00
		LT235/75 R15	104S/101S	WO	11.1	731	235	327	256	6.50	6.00 - 7.00
		P225/75 R15	102S	WO	10.0	721	225	323	245	6.00	6.00 - 7.50
		P215/75 R15	100S	WO	9.9	703	219	316	239	6.00	5.50 - 7.00
	P205/75 R15	97S	WO	9.8	691	206	311	225	5.50	5.00 - 7.00	
	-	35X12.50 R15	113Q	BL	13.1	877	322	384	351	10.00	8.50 - 11.00
33X12.50 R15		108Q	BL	13.1	828	317	365	346	10.00	8.50 - 11.00	
31X10.50 R15		109S	WO	12.4	771	273	343	298	8.50	7.00 - 9.00	
30X9.50 R15		104S	WO	12.4	746	245	333	267	7.50	6.50 - 8.50	
14	70	P225/70 R14	98S	WO	10.0	676	226	303	246	6.50	6.00 - 7.50

□: OPEN COUNTRY A/T A

\* Data is currently updated

[LOAD INDEX] XL: EXTRA LOAD

[SIDE WALL] BL: BLACK LETTERS, WO: OUTLINED WHITE LETTER

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.