




# HIGHWAY TERRAIN OPEN COUNTRY H/T

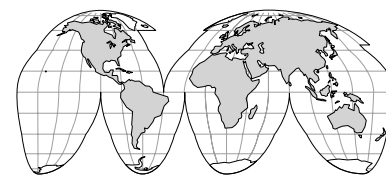

An all-season highway terrain tire, the Open Country H/T offers increased ride comfort, low noise and long tire wear life meeting the demands for light trucks (pickup trucks), vans and SUVs while offering a stylish tread appearance. Its performance based on the high quality of the tire has been optimized not only for dry conditions but also for wet and snowy roads.

2 SUV/4x4

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
22	45	285/45 R22	114H XL	BL	9.7	814	285	379	311	9.50	9.00 - 10.50
20	50	265/50 R20	111V XL	BL	8.6	773	278	357	303	8.50	7.50 - 9.50
	55	275/55 R20	117S	WO	10.3	810	289	372	315	8.50	7.50 - 9.50
		P235/55 R20	102T	BL	9.9	768	238	355	259	7.50	6.50 - 8.50
19	60	P275/60 R20	114S	WO	10.3	841	277	384	302	8.00	7.50 - 9.50
		255/55 R19	111V XL	BL	9.7	762	265	350	289	8.00	7.00 - 9.00
18	55	P245/55 R19	103S	BL	10.0	754	245	347	267	7.50	7.00 - 8.50
		255/55 R18	109V XL	BL	9.7	738	264	338	288	8.00	7.00 - 9.00
		235/55 R18	104V XL	BL	8.0	716	241	330	262	7.50	6.50 - 8.50
	60	235/55 R18	100V	BL	8.0	715	245	329	267	7.50	6.50 - 8.50
		P275/60 R18	111H	BL	10.3	782	276	355	300	8.00	7.50 - 9.50
		265/60 R18	110H	WO	10.2	776	271	353	295	8.00	7.50 - 9.50
		P265/60 R18	109T	WO	10.2	774	269	352	293	8.00	7.00 - 9.50
		255/60 R18	112H XL	BL	10.1	762	257	347	280	6.50	7.00 - 9.00
		P245/60 R18	104H	BL	10.0	753	245	344	267	7.00	7.00 - 8.50
	65	235/60 R18	107V XL	BL	8.5	739	240	339	262	7.00	6.50 - 8.50
		P275/65 R18	114T	WO	10.3	817	279	369	305	8.00	7.50 - 9.50
		LT275/65 R18	123S	WO	12.4	812	277	367	301	8.00	7.50 - 9.00
		P265/65 R18	112S	BL	10.2	800	271	362	295	8.00	7.50 - 9.50
		235/65 R18	106H	BL	9.9	766	245	349	267	7.00	6.50 - 8.50
		P235/65 R18	104T	BL	9.9	766	244	349	266	7.00	6.50 - 8.50
	70	225/65 R18	103H	BL	9.8	751	225	343	245	6.50	6.00 - 8.00
		LT275/70 R18	125S	WO	12.4	840	281	378	306	8.00	7.00 - 8.50
		P265/70 R18	114S	WO	10.4	829	275	374	300	8.00	7.00 - 9.00
17	55	255/70 R18	113S	BL	9.4	817	263	369	287	7.50	6.50 - 8.50
		235/55 R17	99H	BL	10.0	690	239	317	261	7.50	6.50 - 8.50
	60	225/55 R17	101H XL	BL	9.8	681	224	313	244	7.00	6.00 - 8.00
		255/60 R17	106H	BL	10.2	738	261	335	284	7.50	7.00 - 9.00
		235/60 R17	102H	WO	9.9	715	239	326	261	7.00	6.50 - 8.50
		P235/60 R17	100S	WO	9.0	716	239	327	261	7.00	6.50 - 8.50
	65	275/65 R17	115H	WO	10.4	790	279	356	304	8.00	7.50 - 9.50
		275/65 R17	115T	WO	10.3	790	279	356	304	8.00	7.50 - 9.50
		265/65 R17	112H	WO	10.3	777	271	351	295	8.00	7.50 - 9.50
		265/65 R17	112S	WO	10.2	774	268	349	292	8.00	7.50 - 9.50
		P265/65 R17	110S	WO	10.2	774	268	349	292	8.00	7.50 - 9.50
		255/65 R17	110H	WO	10.1	766	261	346	284	7.50	7.00 - 9.00
P255/65 R17		108S	WO	10.1	764	262	345	286	7.50	7.00 - 9.00	
245/65 R17		107H	WO	10.1	750	248	340	270	7.00	7.00 - 8.50	
P245/65 R17		105H	BL	*	*	*	*	*	*	*	*
P245/65 R17		105H	WO	10.0	749	247	340	269	7.00	7.00 - 8.50	
235/65 R17	108V XL	WO	9.9	739	238	336	259	7.00	6.50 - 8.50		
235/65 R17	104H	WO	9.9	737	239	335	261	7.00	6.50 - 8.50		
225/65 R17	102H	BL	9.8	724	226	330	246	6.50	6.00 - 8.00		

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
17	70	P285/70 R17	117T	BL	10.7	830	289	371	315	8.50	7.50 - 9.50
		LT285/70 R17	121S	WO	13.1	830	296	371	323	8.50	7.50 - 9.00
		265/70 R17	115T	WO	10.4	801	273	360	297	8.00	7.00 - 9.00
		P265/70 R17	113T	BL	*	*	*	*	*	*	*
		P265/70 R17	113T	WO	10.4	801	272	360	296	8.00	7.00 - 9.00
		LT265/70 R17	121/118S	WO	12.4	802	272	360	296	8.00	7.00 - 8.50
		LT265/70 R17	121/118R	BL	12.9	800	274	359	299	8.00	7.00 - 8.50
		P255/70 R17	110S	WO	10.3	790	262	356	286	7.50	6.50 - 8.50
		LT245/70 R17	119/116S	WO	12.2	775	248	350	270	7.00	6.50 - 8.00
		P245/70 R17	108S	WO	10.2	776	249	350	271	7.00	6.50 - 8.00
	P235/70 R17	108S XL	WO	10.1	759	240	344	262	7.00	6.00 - 8.00	
	75	LT245/75 R17	121S	WO	12.1	800	252	359	275	7.00	6.50 - 7.50
		P245/75 R17	110S	WO	10.2	800	249	359	271	7.00	6.50 - 8.00
		P235/75 R17	108S	WO	10.2	784	241	353	263	6.50	6.00 - 8.00
LT225/75 R17		116/113Q	BL	11.5	770	222	348	242	6.00	6.00 - 7.50	
80	LT235/80 R17	120/117S	BL	12.1	806	233	362	254	6.50	6.00 - 7.50	
16	60	235/60 R16	100H	BL	9.9	688	240	313	261	7.00	6.50 - 8.50
		215/60 R16	95H	BL	9.7	664	219	304	238	6.50	6.00 - 7.50
	65	255/65 R16	109H	BL	10.1	738	260	333	283	7.50	7.00 - 9.00
		P235/65 R16	101S	BL	9.9	712	243	322	265	7.00	6.50 - 8.50
	70	215/65 R16	98H	BL	9.7	685	223	312	243	6.50	6.00 - 7.50
		P275/70 R16	114H	BL	10.5	791	274	353	299	8.00	7.00 - 9.00
		275/70 R16	114H	WO	10.5	792	279	354	304	8.00	7.00 - 9.00
		265/70 R16	112H	WO	10.4	779	268	349	292	8.00	7.00 - 9.00
		265/70 R16	112S	WO	10.4	778	263	348	286	8.00	7.00 - 9.00
		P265/70 R16	111S	WO	10.4	778	265	348	289	8.00	7.00 - 9.00
		255/70 R16	111H	WO	10.3	763	257	342	280	7.50	6.50 - 8.50
		255/70 R16	111S	WO	10.3	762	256	342	279	7.50	6.50 - 8.50
		P255/70 R16	109S	WO	10.3	762	256	342	279	7.50	6.50 - 8.50
		245/70 R16	107H	WO	10.2	747	245	336	267	7.00	6.50 - 8.00
		245/70 R16	107S	WO	10.2	750	248	337	270	7.00	6.50 - 8.00
		P245/70 R16	106S	WO	10.2	747	243	336	265	7.00	6.50 - 8.00
		235/70 R16	106H	WO	10.2	734	238	331	259	7.00	6.00 - 8.00
		235/70 R16	106T	WO	10.1	736	240	332	262	7.00	6.00 - 8.00
		P235/70 R16	104T	WO	10.1	735	236	331	258	7.00	6.00 - 8.00
		225/70 R16	102T	WO	10.0	722	228	326	249	6.50	6.00 - 7.50
P225/70 R16	101T	WO	10.0	722	228	326	249	6.50	6.00 - 7.50		
215/70 R16	100H	BL	9.9	709	221	321	241	6.50	5.50 - 7.00		
P215/70 R16	99H	BL	9.9	709	220	321	240	6.50	5.50 - 7.00		

# OPEN COUNTRY H/T

2 SUV/4x4

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)	
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)			
16	75	LT285/75 R16	126S	WO	13.1	834	289	370	315	8.00	7.50 - 9.00	
		LT285/75 R16	126/123Q, 10PR	BL	13.6	834	287	370	313	8.00	7.50 - 9.00	
		265/75 R16	116T	WO	10.4	799	270	356	295	7.50	7.00 - 9.00	
		P265/75 R16	114T	WO	10.4	801	265	357	289	7.50	7.00 - 9.00	
		LT265/75 R16	123/120S	WO	12.4	802	274	357	299	7.50	7.00 - 8.00	
		LT265/75 R16	123/120Q	BL	12.9	802	270	358	295	7.50	7.00 - 8.00	
		LT265/75 R16	119/116S	WO	12.4	802	274	357	299	7.50	7.00 - 8.00	
		LT265/75 R16	112S	WO	12.4	802	274	357	299	7.50	7.00 - 8.00	
		LT245/75 R16	120/116S	WO	12.1	773	252	346	275	7.00	6.50 - 8.00	
		245/75 R16	111S	WO	10.2	772	250	346	273	7.00	6.50 - 8.00	
		P245/75 R16	109S	WO	10.2	772	250	346	273	7.00	6.50 - 8.00	
		LT245/75 R16	120/116R	BL	12.6	776	251	348	273	7.00	6.50 - 8.00	
		P235/75 R16	106S	WO	10.2	757	240	340	262	6.50	6.00 - 8.00	
		225/75 R16	118/116S	WO	11.0	744	233	335	254	6.00	6.00 - 7.00	
	LT225/75 R16	115/112S	BL	11.0	743	230	334	251	6.00	6.00 - 7.00		
P225/75 R16	104S	WO	10.0	745	226	335	246	6.00	6.00 - 7.50			
16	85	LT235/85 R16	120/116S	WO	12.1	807	238	359	259	6.50	6.00 - 7.50	
		LT235/85 R16	120/116Q	BL	12.6	803	235	358	256	6.50	6.00 - 7.50	
		LT215/85 R16	115/112S	BL	11.9	772	225	346	245	6.00	5.50 - 7.00	
15	70	265/70 R15	112T	BL	10.4	752	269	335	293	8.00	7.00 - 9.00	
		265/70 R15	112S	BL	10.4	751	266	335	290	8.00	7.00 - 9.00	
		P265/70 R15	110S	BL	10.4	752	264	335	288	8.00	7.00 - 9.00	
		235/70 R15	103T	WO	10.2	711	240	319	262	7.00	6.00 - 8.00	
		235/70 R15	103S	WO	10.1	710	229	319	249	7.00	6.00 - 8.00	
		P235/70 R15	102S	WO	10.1	710	238	319	259	7.00	6.00 - 8.00	
		P225/70 R15	100T	WO	10.0	697	227	314	248	6.50	6.00 - 7.50	
		205/70 R15	96H	BL	9.8	669	209	303	228	6.00	5.00 - 7.00	
	15	75	235/75 R15	109S	BL	10.1	733	239	328	261	6.50	6.00 - 8.00
			235/75 R15	109S	WO	*	*	*	*	*	*	*
			P235/75 R15	105S	WO	10.1	734	236	328	257	6.50	6.00 - 8.00
			LT235/75 R15	104/101S	WO	11.1	731	241	327	263	6.50	6.00 - 7.00
15	-	P225/75 R15	102S	WO	10.0	720	226	323	246	6.00	6.00 - 7.50	
		31X10.50 R15	109S	WO	12.4	770	278	342	303	8.50	7.00 - 9.00	

□: OPEN COUNTRY H/T A

○: TUFF DUTY

\* Data is currently updated

[LOAD INDEX] XL: EXTRA LOAD

[SIDE WALL] BL: BLACK LETTERS, WO: OUTLINED WHITE LETTER

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.