




MUD TERRAIN

OPEN COUNTRY M/T

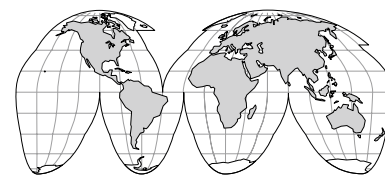

This all-around light truck radial has been specifically designed for lifted pickup applications. The Open Country M/T incorporates new levels of technology that gives it incredible uniformity for superior handling and control in both off road and street driving.

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)	
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)			
24	-	37X13.50 R24	120Q	BL	16.7	940	345	437	350	11.00	8.50 - 11.00	
22	-	40X15.50 R22	127Q	BL	16.7	1009	404	469	445	12.00	11.00 - 13.00	
		37X13.50 R22	123Q	BL	16.7	941	356	438	368	11.00	8.50 - 11.00	
		35X12.50 R22	117Q	BL	16.7	889	325	413	338	10.00	8.50 - 11.00	
		33X12.50 R22	109Q	BL	15.0	838	315	390	324	10.00	8.50 - 11.00	
20	60	LT315/60 R20	125/122Q	BL	16.4	889	320	413	337	9.50	8.50 - 11.00	
	65	LT275/65 R20	126/123P	BL	15.2	877	280	408	300	8.00	7.50 - 9.50	
	-	40X15.50 R20	130Q	BL	16.7	1009	404	469	415	12.00	11.00 - 13.00	
		38X15.50 R20	125Q	BL	16.7	958	404	445	430	12.00	11.00 - 13.00	
		38X13.50 R20	124Q	BL	16.7	958	365	445	375	11.00	8.50 - 11.00	
		37X13.50 R20	127Q	BL	16.7	941	356	438	368	11.00	8.50 - 11.00	
		35X12.50 R20	121Q	BL	16.7	890	330	414	345	10.00	9.00 - 11.00	
		33X12.50 R20	114Q	BL	16.7	837	320	389	325	10.00	8.50 - 11.00	
18	70	LT315/70 R18	127/124Q	BL	16.4	907	330	422	350	9.50	8.00 - 11.00	
		LT285/70 R18	127/124Q	BL	15.0	866	289	403	308	8.50	7.50 - 9.50	
		LT275/70 R18	125P	BL	15.2	854	280	397	295	8.00	7.00 - 8.50	
	-	75	LT285/75 R18	129/126P	BL	15.2	892	295	415	318	8.00	7.50 - 9.50
		-	38X15.50 R18	128Q	BL	16.7	958	404	424	440	12.00	11.00 - 13.00
			38X13.50 R18	126Q	BL	16.7	958	365	445	381	11.00	8.50 - 11.00
			37X13.50 R18	124Q	BL	16.7	941	360	438	378	11.00	8.50 - 11.00
			35X12.50 R18	123Q	BL	16.7	890	335	397	365	10.00	8.50 - 11.00
			33X12.50 R18	118Q	BL	16.7	837	322	389	328	10.00	8.50 - 11.00
			17	70	LT295/70 R17	128P	BL	15.4	852	304	396	314
LT265/70 R17	121P	BL			15.0	813	275	378	290	8.00	7.00 - 8.50	
75	LT285/75 R17	121P		BL	15.2	867	295	403	305	8.00	7.50 - 9.50	
-	37X13.50 R17	131Q		BL	16.7	941	370	438	393	11.00	8.50 - 11.00	
	35X12.50 R17	125Q		BL	16.7	885	335	412	350	10.00	8.50 - 11.00	
16	70	LT385/70 R16	130Q	BL	16.7	958	395	445	412	11.00	10.00 - 12.00	
		LT305/70 R16	124P	BL	15.9	840	310	391	320	9.00	8.00 - 9.50	
		LT315/75 R16	127Q	BL	16.7	886	327	412	341	8.50	8.00 - 11.00	
	75	LT315/75 R16	121P, 8PR	BL	16.7	886	327	412	341	8.50	8.00 - 11.00	
		LT285/75 R16	126P	BL	15.2	839	295	390	305	8.00	7.50 - 9.00	
		LT265/75 R16	123P	BL	15.0	810	275	377	290	7.50	7.00 - 8.00	
		LT245/75 R16	120/116P	BL	14.6	782	253	364	268	7.00	6.50 - 8.00	
		85	LT255/85 R16	123/120P	BL	15.0	851	260	396	285	7.00	6.50 - 8.00
			LT235/85 R16	120/116P	BL	14.6	813	240	378	260	6.50	6.00 - 7.50
	15	-	37X14.50 R15	120Q	BL	16.7	931	396	433	419	12.00	10.00 - 12.00
35X13.50 R15			114Q	BL	16.7	885	365	387	398	11.00	8.50 - 11.00	
33X13.50 R15			109Q	BL	16.7	840	354	391	363	11.00	8.50 - 11.00	
33X12.50 R15			108P	BL	16.7	840	325	391	340	10.00	8.00 - 11.00	
33X10.50 R15			114P	BL	15.2	834	278	388	300	8.50	7.00 - 9.00	
31X10.50 R15			109Q	BL	15.2	790	273	367	293	8.50	7.00 - 9.00	
31X10.50 R15			109P	BL	15.2	790	273	367	293	8.50	7.00 - 9.00	

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.