




# PROXES S/T

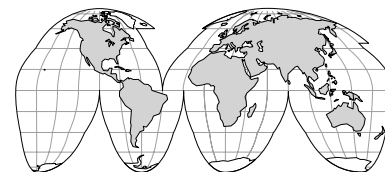

The Proxes S/T is a low-profile high-performance tire that delivers a good combination of all-season handling with smooth and stable ride for sport trucks and SUVs.

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
26	30	305/30 R26	109V XL	BL	9.0	841	308	400	336	11.0	10.50 - 11.50
24	30	295/30 R24	105V XL	BL	8.5	790	290	375	316	10.5	10.00 - 11.00
	35	305/35 R24	112V XL	BL	8.7	825	307	389	335	11.0	10.00 - 12.00
	40	285/40 R24	112V XL	BL	8.5	836	287	393	313	10.0	9.50 - 11.00
	45	325/45 R24	120V	BL	8.9	898	321	417	350	11.0	10.00 - 12.00
23	35	285/35 R23	107V XL	BL	8.5	785	286	370	312	10.0	9.50 - 11.00
	40	305/40 R23	115V XL	BL	8.7	832	306	389	324	11.0	10.00 - 12.00
22	35	285/35 R22	106W XL	BL	8.5	757	288	357	314	10.0	9.50 - 11.00
		285/35 R22	102W	BL	8.5	757	288	357	314	10.0	9.50 - 11.00
		265/35 R22	102W XL	BL	8.3	745	265	352	289	9.5	9.00 - 10.50
	40	325/40 R22	118V XL	BL	8.7	819	333	381	363	12.0	11.00 - 13.00
		305/40 R22	114V XL	BL	8.7	803	309	375	336	11.0	10.00 - 12.00
		285/40 R22	110V XL	BL	8.8	787	285	369	311	10.0	9.50 - 11.00
		265/40 R22	106V XL	BL	8.3	771	267	362	291	9.5	9.00 - 10.50
	45	305/45 R22	118V XL	BL	8.7	829	303	385	330	10.0	9.50 - 11.50
		285/45 R22	114V XL	BL	8.6	818	284	380	310	9.5	9.00 - 10.50
	50	325/50 R22	120V	BL	9.1	881	330	405	360	10.0	9.00 - 11.50
20	35	315/35 R20	106W	BL	8.8	726	313	339	341	11.0	10.50 - 12.50
	40	295/40 R20	106V	BL	8.3	742	296	345	323	10.5	10.00 - 11.50
		275/40 R20	106W XL	BL	8.4	726	274	339	299	9.5	9.00 - 11.00
		255/40 R20	101V XL	BL	8.2	710	257	333	280	9.0	8.50 - 10.00
	45	295/45 R20	114V XL	BL	8.7	772	294	357	320	10.0	9.50 - 11.00
		275/45 R20	110V XL	BL	8.5	756	269	351	293	9.0	8.50 - 10.50
		265/45 R20	108V XL	BL	8.3	747	267	347	290	9.0	8.50 - 10.00
	50	255/45 R20	105V XL	BL	8.3	739	256	344	279	8.5	8.00 - 9.50
		325/50 R20	120V	BL	9.4	830	333	380	363	10.0	9.00 - 11.50
		305/50 R20	120V XL	BL	9.1	810	312	372	340	9.5	8.50 - 11.00
		285/50 R20	116V XL	BL	8.6	789	294	364	320	9.0	8.00 - 10.00
		265/50 R20	111V XL	BL	9.0	772	280	357	305	8.5	7.50 - 9.50
	255/50 R20	109V XL	BL	8.9	760	260	352	283	8.0	7.00 - 9.00	
	55	275/55 R20	117V XL	BL	8.9	809	279	371	304	8.5	7.50 - 9.50
	19	45	285/45 R19	107V	BL	8.4	739	285	341	311	9.5
50		255/50 R19	103V	BL	8.9	739	265	341	289	8.0	7.00 - 9.00
55		255/55 R19	111V XL	BL	8.7	763	264	351	288	8.0	7.00 - 9.00
18	45	255/45 R18	99V	BL	8.3	688	254	319	277	8.5	8.00 - 9.50
	50	285/50 R18	109V	BL	8.6	738	294	338	320	9.0	8.00 - 10.00
		255/50 R18	106V XL	BL	8.9	709	260	327	283	8.0	7.00 - 9.00
		235/50 R18	101V XL	BL	8.7	692	240	320	262	7.5	6.50 - 8.50
	55	275/55 R18	114V XL	BL	8.9	758	281	346	306	8.5	7.50 - 9.50
		255/55 R18	109V XL	BL	8.7	735	263	337	287	8.0	7.00 - 9.00
	60	305/60 R18	120V	BL	9.4	818	317	369	346	9.0	8.50 - 11.00
		285/60 R18	116V	BL	9.0	798	294	362	312	8.5	8.00 - 10.00
		255/60 R18	112V XL	BL	8.7	761	264	347	288	8.0	7.00 - 9.00
		235/60 R18	107V XL	BL	8.5	740	244	339	266	7.0	6.50 - 8.50
65	225/65 R18	103V	BL	8.2	748	226	342	246	6.5	6.00 - 8.00	

2 SUV/4x4

# PROXES S/T

2 SUV/4x4

RIM DIA.	ASPECT RATIO	TIRE SIZE	LOAD INDEX / SPEED SYMBOL	SIDE WALL	TREAD DEPTH (mm)	INFLATED DIMENSION		LOADED DIMENSION		MEASURING RIM WIDTH (Inch)	ALTERNATE RIM (Inch)
						OVERALL DIA. (mm)	OVERALL WIDTH (mm)	STATIC RADIUS (mm)	STATIC WIDTH (mm)		
17	55	275/55 R17	109V	BL	8.9	733	281	333	306	8.5	7.50 - 9.50
		225/55 R17	97V	BL	8.4	679	231	312	252	7.0	6.00 - 8.00
	60	285/60 R17	114V	BL	9.0	772	294	349	312	8.5	8.00 - 10.00
		275/60 R17	111V	BL	8.9	760	279	344	296	8.0	7.50 - 9.50
		255/60 R17	110V XL	BL	8.7	736	260	335	276	7.5	7.00 - 9.00
65	235/65 R17	104V	BL	8.3	735	240	334	262	7.5	6.50 - 8.50	
16	60	275/60 R16	109V	BL	8.9	733	282	331	307	8.0	7.00 - 9.00
	70	275/70 R16	114H	BL	9.0	795	274	355	299	8.0	7.00 - 9.00
		265/70 R16	112V	BL	8.9	780	262	349	286	8.0	7.00 - 9.00
		245/70 R16	107V	BL	8.7	752	247	338	269	7.0	6.50 - 8.00
15	50	P295/50 R15	105H	BL	9.1	674	315	305	334	9.5	8.00 - 10.00
	60	P275/60 R15	107H	BL	8.9	709	283	318	300	8.0	7.50 - 9.50

[LOAD INDEX] XL: EXTRA LOAD

[SIDE WALL] BL: BLACK LETTERS

Data as of October 2010. All products of Toyo Tires are subject to continuous development. Toyo Tires reserves the right to change construction, materials or specifications without notice or obligation.